


Detail of the tile edge with assembled chamber

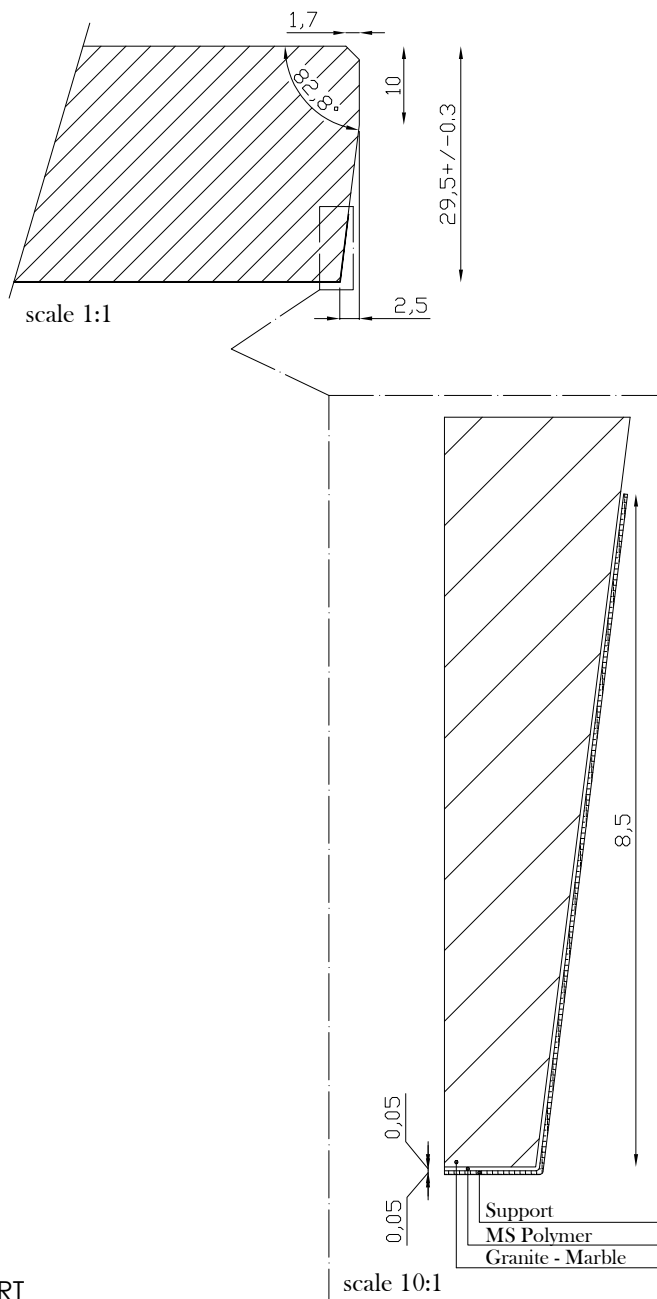

DIMENSIONAL TOLERANCES OF PRODUCTION

Squaring +/- 0,5 mm
 Sides bending +/- 0,5 mm

DIMENSIONS

Standard 600x600 mm

MATERIAL CHARACTERISTICS

Covering: marble, granite, agglomerated marble, marblemement

TECHNICAL CHARACTERISTICS

Covering's technical characteristics depends on the CE-marking of the chosen material

CHAMBER CHARACTERISTICS

Galvanised steel chamber

STATIC LOAD OF THE FLOOR COMBINED TO THE SUPPORT


According to EN 12825 (tested on columns h 120 mm, height finished floor 150 cm)

Type of load	Tensile strength	Strength with warp 2.5 mm
At the centre of the panel edge	7.000,00 N	6.500,00 N
At a diagonal 70 mm from the edge	8.000,00 N	//
At the centre of the panel	15.000,00 N	7.000,00 N

average values, the real capacity depends on the characteristics of the covering and must be evaluated for each case

ratio 1 KN about 101,90 kg
 ratio 1 N about 0,102 kg
 ratio 1 KN about 1000 N

measurements in mm



GANMAR s.r.l.

lavorazioni marmi e graniti

Viale E. Fermi 1 37010 Cavaion V.se

tel. +39.045.6261312

fax +39.045.6267444

E-mail ganmar@ganmar.it

www.ganmar.it

Il presente disegno è di proprietà esclusiva della Ganmar s.r.l. pertanto se ne vieta l'utilizzo.
 I trasgressori verranno perseguiti a termine di legge.